

900 MHz PMP 450

Access Point / Subscriber Module

QUICK LOOK:

Cambium Networks industry-leading 450 platform includes the all new PMP 450i and PTP 450i radios. The 450i product platform is the most scalable industrial-grade wireless broadband solution available.

- **Ultra-wide band radios:
5 GHz or 3 GHz**
- **Rugged metal enclosure**
- **2x2 OFDM MIMO radio capable
of up to 300 Mbps per sector**



ULTRA-WIDE BAND RADIOS

Supports the entire band, whether in 5 GHz or 3 GHz. Advanced radio design improves transmit power and increases receive sensitivity.

RUGGED METAL ENCLOSURE

Designed to meet IP-66 and IP-67 standards to withstand harsh environments. Optional ATEX/HAZLOC certified models available for hazardous deployments.

DYNAMIC INTERFERENCE FILTERING

Provides industry-leading noise isolation for improved performance.

UPDATED FPGA AND SOC ARCHITECTURE

Triplies the processing power compared to PMP 450.

MULTIFUNCTION AUX PORT

Allows for greater flexibility for deployment by adding a camera or other PoE directly.

OPTIONS FOR INTEGRATED 90° SECTOR ANTENNA

Optimized for frequency re-use (>35 dB F/B), high gain, null fill and predictable performance, or Integrated 10° sector antenna for highly directional sectors.

INCREASE THROUGHPUT

Now capable of up to 300 Mbps per sector in a 40 MHz channel.

900 MHz PMP 450 Access Point /Subscriber Module

Product					
		3 GHz	5 GHz	5 GHz ATEX/HAZLOC	
Model Numbers	Connectorized	C030045C001A	C050045C001B	C050045C003B	
	Integrated	C030045C002A	C050045C002C	C050045C004B	

Spectrum	
Channel Spacing	Configurable on 2.5 MHz increments, 3 GHz customizable to 50 KHz
Frequency Range	3 GHz: 3300 - 3900 MHz 5 GHz: 4900 - 5925 MHz
Channel Width	5 MHz, 7 MHz, 10 MHz, 15 MHz, 20 MHz, 30 MHz or 40 MHz 5 MHz, 10 MHz, 15 MHz, 20 MHz, 30 MHz or 40 MHz

Interface	
MAC (Media Access Control) Layer	Cambium Networks proprietary
Physical Layer	2x2 MIMO OFDM
Ethernet Interface	100/1000BaseT, full duplex, rate auto negotiated (802.3 compliant)
Protocols Used	IPv4, IPv6, UDP, TCP/IP, ICMP, Telnet, SNMP, HTTP, FTP
Network Management	IPv4/IPv6 (dual stack), HTTP, HTTPS, Telnet, FTP, SNMPv2c and v3, Cambium Networks cnMaestro™
MTU	1700 bytes
VLAN	802.1ad (DVLAN Q-inQ), 802.1Q with 802.1p priority, dynamic port VID



900 MHz PMP 450 Access Point /Subscriber Module

Specifications

Performance

ARQ	Yes
Modulation Levels (Adaptive)	MCS
2x	QPSK
4x	16QAM
6x	64QAM
8x	256QAM
Signal to Noise Required (SNR, in dB)	
	10
	17
	24
	32
Maximum Deployment Range	Up to 40 miles (64 km)
Latency	3 - 5 ms, typical
GPS Synchronization	Yes, via Autosync (CMM5 or UGPS)
Quality of Service	Diffserve QoS

Physical

Antenna Connection	50 ohm, N-Type (Connectorized version only)				
Surge Suppression (LPU fitted)	EN61000-4-5: 1.2us/50us, 500 V voltage waveform Recommended external surge suppressor: Cambium Networks Model # C000000L033A				
Mean Time Between Failure	> 40 Years				
Dust and Water Ingress Protection Rating	IP67, IP66				
Temperature / Humidity	-40°C to 75°C (-40°F to 167°F), 0-100% condensing				
Weight	<table border="1"> <tr> <td>Connectorized</td> <td>Approx. 2.0 kg (4.5 lbs)</td> </tr> <tr> <td>Integrated</td> <td>Approx. 2.5 kg (5.5 lbs)</td> </tr> </table>	Connectorized	Approx. 2.0 kg (4.5 lbs)	Integrated	Approx. 2.5 kg (5.5 lbs)
Connectorized	Approx. 2.0 kg (4.5 lbs)				
Integrated	Approx. 2.5 kg (5.5 lbs)				
Wind Survival	322 km/h (200 mi/h)				
Vibration	NEMA TS2 Section 2.1.9 and Section 2.2.3				
Shock	NEMA TS2 Section 2.1.10 and Section 2.2.4				
External Icing	NEMA 250-2003 Section 5.6				
Dimensions (HxWxD)	<table border="1"> <tr> <td>Connectorized</td> <td>26.0 x 13.4 x 6.4 cm (10.25" x 5.25" x 3.25")</td> </tr> <tr> <td>Integrated</td> <td>31.0 x 31.0 x 6.4 cm (12" x 12" x 2.5")</td> </tr> </table>	Connectorized	26.0 x 13.4 x 6.4 cm (10.25" x 5.25" x 3.25")	Integrated	31.0 x 31.0 x 6.4 cm (12" x 12" x 2.5")
Connectorized	26.0 x 13.4 x 6.4 cm (10.25" x 5.25" x 3.25")				
Integrated	31.0 x 31.0 x 6.4 cm (12" x 12" x 2.5")				
Power Consumption	15 W typical, 18 W max, Using Aux port PoE for another device will increase power draw				
Input Voltage	48-59 V DC, 802.3at compliant				
Mounting	Wall or Pole mount with Cambium Networks Model # N000045L002A				

900 MHz PMP 450 Access Point /Subscriber Module

Link Budget

	3 GHz	5 GHz
Antenna Beam Width	17° azimuth for integrated antenna	10° azimuth for integrated antenna
Antenna Gain	+19 dBi dual slant integrated, or external	+23 dBi H+V integrated, or external
Maximum Transmit Power	+25 dBm (MIMO, Combined H+V)	+28 dBm (MIMO, Combined H+V) (may be limited by regulations)
Maximum EIRP	+43 dBm combined output (may be limited by regulations)	+50 dBm combined output (may be limited by regulations)
Power Control	ATPC (Automatic Transmit Power Control) at system level, all Subscribers implement ATPC	

Security


Encryption	FIPS-197 128-bit AES, 256-bit AES (<i>Requires Optional License</i>)
-------------------	---

Certifications


	3 GHz	5 GHz
ISED Canada	109W-0028	109AO-50450I
FCC ID	Z8H89FT0028	QWP-50450I
CE	EN 302 326-2 v1.2.2	EN 301 893 v2.1.1 <hr/> EN 302 502 v2.1.1

900 MHz PMP 450 Access Point /Subscriber Module

5 GHz Antenna Pattern for Integrated SM

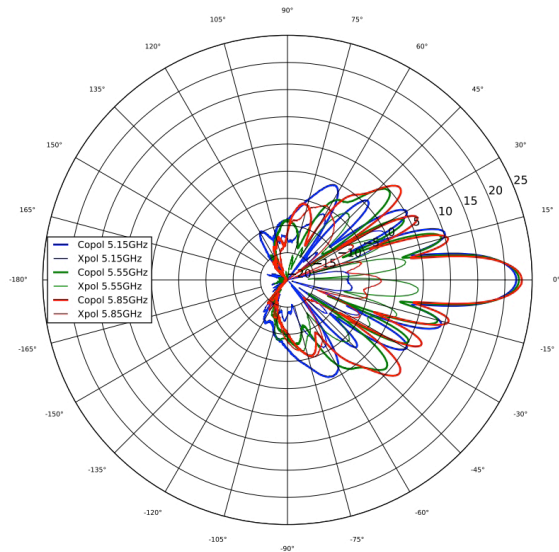


5 GHz Azimuth

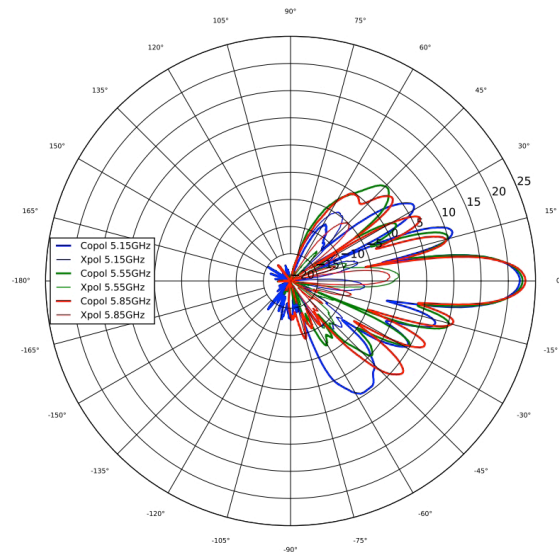


5 GHz Elevation

3 GHz Antenna Pattern for Integrated SM

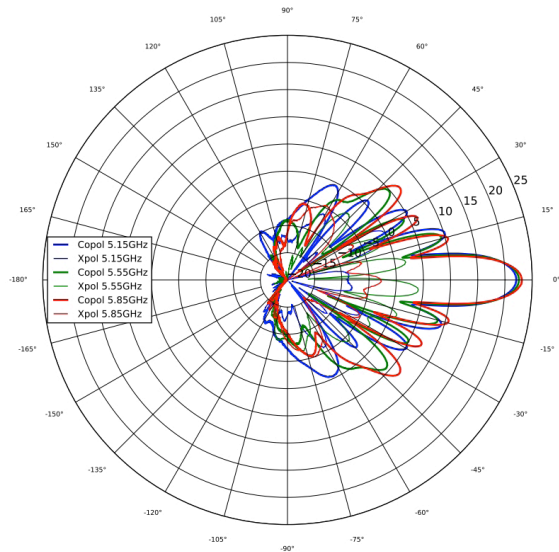

3 GHz Azimuth

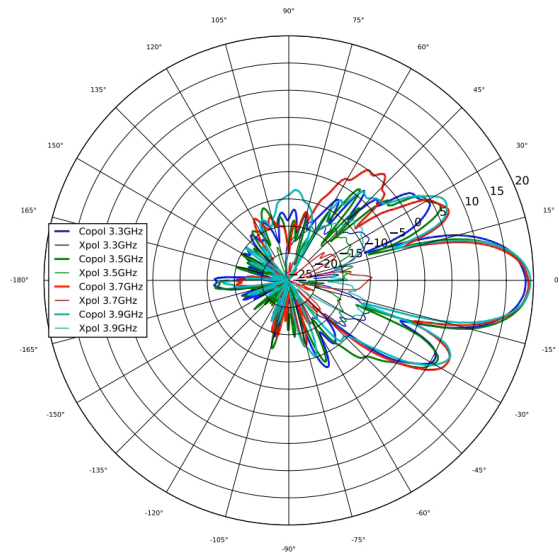

3 GHz Elevation

ABOUT CAMBIUM NETWORKS

Cambium Networks empowers millions of people with wireless connectivity worldwide. Its wireless portfolio is used by commercial and government network operators as well as broadband service providers to connect people, places and things. With a single network architecture spanning fixed wireless and Wi-Fi, Cambium Networks enables operators to achieve maximum performance with minimal spectrum. End-to-end cloud management transforms networks into dynamic environments that evolve to meet changing needs with minimal physical human intervention. Cambium Networks empowers a growing ecosystem of partners who design and deliver gigabit wireless solutions that just work.